




BEARING-MALAYSIA SDN.BHD.

NTN NKX40Z Complex bearing

Bearing No. NKX40Z

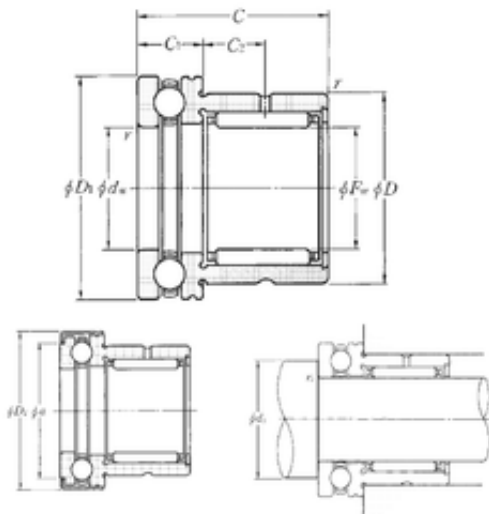

NKX40Z Bearing 2D drawings and 3D CAD models

Bore Diameter	40 mm
Outer Diameter	61 mm
d	40 mm
Fw	40 mm
D	52 mm
D1	60 mm
D2	61 mm
C	32 mm
a	55,7 mm
r min.	0,6 mm
C1	13 mm
da min.	52 mm
ra max.	0,6 mm
C2	10 mm
Weight	0,225 Kg
Dynamic load rating radial (C)	25,9 kN
Dynamic load rating axial (C)	26,9 kN
Static load rating radial (C0)	52,5 kN
Static load rating axial (C0)	63 kN
(Grease) Lubrication Speed	3500 r/min
dw	40 mm
rs min	0.6 mm
Dw	2.5 mm
Dw1	7.14 mm
Lw	15.3 mm



BEARING-MALAYSIA SDN.BHD.

Lubrication hole on outer ring	Oui/Yes
Precision class	P0
Mass	0.22 kg
Cr	25.9 kN
Ca	26.9 kN
C0r	52.5 kN
C0a	63 kN
Nlim (grease)	3,500 rpm
Nlim (oil)	5,000 rpm
Min operating temperature, Tmin	-20 ° C
Max operating temperature, Tmax	120 ° C
da min	52 mm
ras max	0.6 mm
Category	Roller Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.226
Product Group	B04144